

Lecture Notes in Civil Engineering

Fadzli Mohamed Nazri *Editor*

# Proceedings of AICCE'19

Transforming the Nation  
for a Sustainable Tomorrow

 Springer

# Lecture Notes in Civil Engineering

Volume 53

## Series Editors

Marco di Prisco, Politecnico di Milano, Milano, Italy

Sheng-Hong Chen, School of Water Resources and Hydropower Engineering,  
Wuhan University, Wuhan, China

Ioannis Vayas, Institute of Steel Structures, National Technical University of  
Athens, Athens, Greece

Sanjay Kumar Shukla, School of Engineering, Edith Cowan University, Joondalup,  
WA, Australia

Anuj Sharma, Iowa State University, Ames, IA, USA

Nagesh Kumar, Department of Civil Engineering, Indian Institute of Science  
Bangalore, Bangalore, Karnataka, India

Chien Ming Wang, School of Civil Engineering, The University of Queensland,  
Brisbane, QLD, Australia

**Lecture Notes in Civil Engineering** (LNCE) publishes the latest developments in Civil Engineering—quickly, informally and in top quality. Though original research reported in proceedings and post-proceedings represents the core of LNCE, edited volumes of exceptionally high quality and interest may also be considered for publication. Volumes published in LNCE embrace all aspects and subfields of, as well as new challenges in, Civil Engineering. Topics in the series include:

- Construction and Structural Mechanics
- Building Materials
- Concrete, Steel and Timber Structures
- Geotechnical Engineering
- Earthquake Engineering
- Coastal Engineering
- Ocean and Offshore Engineering; Ships and Floating Structures
- Hydraulics, Hydrology and Water Resources Engineering
- Environmental Engineering and Sustainability
- Structural Health and Monitoring
- Surveying and Geographical Information Systems
- Indoor Environments
- Transportation and Traffic
- Risk Analysis
- Safety and Security

To submit a proposal or request further information, please contact the appropriate Springer Editor:

- Mr. Pierpaolo Riva at [pierpaolo.riva@springer.com](mailto:pierpaolo.riva@springer.com) (Europe and Americas);
- Ms. Swati Meherishi at [swati.meherishi@springer.com](mailto:swati.meherishi@springer.com) (Asia—except China—and Australia/NZ);
- Ms. Li Shen at [li.shen@springer.com](mailto:li.shen@springer.com) (China).

**Indexed by Scopus**

More information about this series at <http://www.springer.com/series/15087>

Fadzli Mohamed Nazri  
Editor

# Proceedings of AICCE'19

Transforming the Nation for a Sustainable  
Tomorrow

 Springer

*Editor*

Fadzli Mohamed Nazri  
School of Civil Engineering  
Universiti Sains Malaysia  
Penang, Malaysia

ISSN 2366-2557

ISSN 2366-2565 (electronic)

Lecture Notes in Civil Engineering

ISBN 978-3-030-32815-3

ISBN 978-3-030-32816-0 (eBook)

<https://doi.org/10.1007/978-3-030-32816-0>

© Springer Nature Switzerland AG 2020

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG  
The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland

# Preface

The AWAM International Conference on Civil Engineering 2019 (AICCE'19) was held in Malaysia on August 21–22, 2019, at PARKROYAL Resort, Penang. This event marked the 30th anniversary of the School of Civil Engineering since its establishment in 1989. The conference was organized by the School of Civil Engineering, Universiti Sains Malaysia, in collaboration with Construction Industry Development Board (CIDB), Malaysia, in line with the theme of *Transforming the Nation for a Sustainable Tomorrow*.

Over 200 distinguished researchers, postgraduate students, practitioners, and engineers from all over the world gathered for this conference, and more than 100 well-qualified papers were presented. Several distinguished keynote speakers invited from industry and academia presented topics focusing on sustainable development in the scope of civil engineering. In this conference, several parallel sessions were held. The conference provided a forum for discussing recent developments in a wide variety of topics in six major fields of civil engineering, which include structural and earthquake engineering, environmental engineering, geotechnical engineering, highway and transportation engineering, water resources engineering, and geomatic and construction management. During this event, all participants were allowed to interchange ideas among the audiences to deepen the knowledge of ongoing research.

The success of the conference was due to the collective efforts of a large number of organizations and individuals. Special acknowledgment goes to the members of the Construction Industry Development Board (CIDB), Malaysia, for its full support of the conference. Acknowledgment with gratitude also goes to the staff of the School of Civil Engineering for their devoted assistance in making this event/conference a success. We would like to thank all reviewers for their invaluable efforts. Special thanks to Assistant Professor Dr. Ehsan Noroozinejad from Graduate University of Advanced Technology, Iran, for his invaluable work

as the co-editor of this conference proceedings. Finally, the generous support, from the Universiti Sains Malaysia throughout this conference, is greatly appreciated.

Fadzli Mohamed Nazri  
School of Civil Engineering  
Universiti Sains Malaysia  
Penang, Malaysia

# Contents

<b>Finite Element Analysis on Torsion Behaviour for Tapered Steel Section with Perforation</b> . . . . .	1
Fatimah De’nan, Nor Salwani Hashim and Nor Amirah Yaani	
<b>Theoretical, CFD Simulation and Experimental Study to Predict the Flowrate Across a Square Edge Broad Crested Weir Depending on the End Depth as a Control Section</b> . . . . .	15
Sadiq S. Muhsun, Sanaa A. Talab Al-Osmy, Shaymaa Abdul Muttaled Al-Hashimi and Zainab T. Al-Sharify	
<b>Optimization of Egg Shell Powder and Lime for Waste Soil Improvement at Open Dumping Area Using Monte Carlo Simulations</b> . . . . .	35
Nur Irfah M. Pauzi, Mior A. Aimran, Mohammad S. Ismail and Mohd Shahril M. Radhi	
<b>Preference Assessment and Prioritization of the Urban Green Space Features Using Qualitative Evaluation and AHP Decision Model</b> . . . . .	47
Mohd Sanusi S. Ahamad, Rabi’ah Ahmad and Abdul Nasir Matori	
<b>Sustainability Assessment of the School Building Site (Case Study: Schools Built After 2003 in Karbala)</b> . . . . .	71
Ghayath Ali	
<b>Development of Design Acceleration Response Spectrum for Building Based on New Indonesian Seismic Hazard Maps 2017</b> . . . . .	91
Windu Partono, Masyhur Irsyam, I. Wayan Sengara, Asrurifak, Frida Kistiani and Undayani Cita Sari	
<b>Trip Distribution Gravity Model of Al-Diwaniyah City: A Case Study</b> . . . . .	105
Rana A. Yousif, Sady A. Tayh and Abbas F. Jasim	



<b>Methods of Estimating Time of Concentration: A Case Study of Urban Catchment of Sungai Kerayong, Kuala Lumpur</b> . . . . .	119
Rofiat Bunmi Mudashiru, Ismail Abustan and Fauzi Baharudin	
<b>The Permeability and Strength of Compacted Laterite Soil-Bentonite Mixtures for Landfill Cover Application</b> . . . . .	163
Ros N. Rosli, Mohamad R. Selamat and Harris Ramli	
<b>Investigation of Brick Masonry Behaviour Under Uniaxial Compression Test at Different Scales</b> . . . . .	177
Tze Che Van, Tze Liang Lau and Fadzli Mohamed Nazri	
<b>Spatial Risk Mapping of House Fly Habitat in South Seberang Perai Penang, Malaysia</b> . . . . .	187
Mohd Sanusi S. Ahamad and Nor Roshida Rosli	
<b>Capacity Estimation of Multi-lane Rural Highway: A Comparative Study</b> . . . . .	201
Mahdi Ibrahim Alkubaisi	
<b>CPTU Penetrations into the Marine Clays and Laterite Soils of Northwest Peninsular Malaysia</b> . . . . .	215
Mohamad R. Selamat, Dziaudin Z. Abidin, Muhammad Z. Yusoff, Ros N. Rosli, Muhd H. Ramli, Ashraf Q. Alkinani and Reda A. Abdelhalim	
<b>Finite Element Analysis of the Screw Arrangement Effects on the Connection Behaviour for Cold Formed Steel Truss Systems</b> . . . . .	229
Fatimah De'nan, Kok Keong Choong, Jessica Si Jia Loo and Nor Salwani Hashim	
<b>Seismic Hazard Analysis Study of New Semarang International Airport Due to Shallow Crustal Fault Earthquake Scenario</b> . . . . .	249
Windu Partono, Masyhur Irsyam, I. Wayan Sengara, Asrurifak, Frida Kistiani, Undayani Cita Sari and Haryadi	
<b>Morphometric Analysis of Galal Bedrah River Basin Using STRM (DEM) Data and GIS Techniques</b> . . . . .	265
Mohammed S. Shamkhi, Atyaf J. Mohson and Tabark J. Abdullah	
<b>Determination of Watershed Characteristics Using GIS Technique (AL-Adhaim Watershed in Iraq)</b> . . . . .	277
Mohammed S. Shamkhi, Tabark J. Abdullah and Atyaf J. Mohson	
<b>Serious Conflicts: A Safety Performance Measure at Signalized Intersections</b> . . . . .	291
Raghad Zeki Abdul-Majeed and Hussein A. Ewadh	

<b>Improving the Mechanical Properties of Low, Normal and High Strength Concretes</b> .....	307
Yaarub Gatia Abtan and Hassan Falah Hassan	
<b>Application of Geographic Information Systems (GIS) in the Multi Criteria Site Selection of Retention Pond for Urban Rainwater Management</b> .....	317
Darman F. Saragih, Mohd Sanusi S. Ahamad and Rozi Abdullah	
<b>Disinfection By-Products Precursors Removal by Simultaneous Coagulation and Disinfection in River Water</b> .....	331
Nur Izzati Naserun and Nurul Hana Mokhtar Kamal	
<b>Underlying Disaster Risk Factors for Sustainable Coastal Development Projects in Malaysia</b> .....	343
Sharifah Akmam Syed Zakaria, Mohd Azrulfitri Azimi and Taksiah A. Majid	
<b>Exploration of Training and Education for Attaining Disaster Resilience from Sustainability Perspective Among Civil Engineering Students</b> .....	361
Sharifah Akmam Syed Zakaria, Taksiah A. Majid, Tze Liang Lau and Mohd Azrulfitri Azimi	
<b>A Review on the Government’s Way Forward Policy Towards Environmental Sustainability Construction Projects in Malaysia by 2020</b> .....	377
Nurul U’lyani Mohd Najib and Farid Ezanee Mohamed Ghazali	
<b>Change Order Impact on Construction Industry of Pakistan</b> .....	391
Muhammad Altaf, Muhammad Ali Musarat, Azizullah Khan, Zohaib Shoukat and Usman Salahuddin	
<b>An Investigation of Causes of Delay Affecting the United Arab Emirates Construction Industry</b> .....	403
Abdulhamid AlGheth and Md. Ishak Sayuti	
<b>Effects of Micro- and Ultrafine Metakaolin on Compressive Strength and Water Sorptivity of High Volume Fly Ash Concrete</b> .....	415
Steve W. M. Supit and Febriane Makalew	
<b>Review of Delay Causes in Construction Projects</b> .....	429
Abdulhamid AlGheth and Md. Ishak Sayuti	
<b>The Influence of Type and Combination of Polycarboxylate-Based (PCE) Superplasticizer on the Rheological Properties and Setting Behaviours of the Self-consolidating Concrete Containing GGBS and DSF</b> .....	439
Chow Wee Kang, Cheah Chee Ban and Oo Chuan Wei	

<b>Effect of Various Grades of <math>\text{Na}_2\text{SiO}_3</math> on Compressive Strength Development of Eggshells Powder-Based Alkaline Activated Mortar</b> .....	453
Mohamed O. M. Mashri, Megat Azmi Megat Johari, M. J. A. Mijarsh and Zainal Arifin Ahmad	
<b>Numerical Simulation of ISO Freight Container Using Finite Element Modelling</b> .....	463
Philip Chie Hui Ling and Cher Siang Tan	
<b>Stability and Overtopping Assessment of Tanjung Piai Stone Revetment via Two-Dimensional Hydraulic Modelling</b> .....	471
Mohd Kamarul Huda Samion, Saiful Bahri Hamzah and Safari Mat Desa	
<b>Finite Element Analysis of the Effect of Screw Number on the Connection Behaviour for Cold Form Steel Truss Systems</b> . . . .	481
Fatimah De'nan, Kok Keong Choong, Jessica Loo Si Jia and Nor Salwani Hashim	
<b>Load-Displacement Behaviors of Reinforced Concrete Beam Embedded with Galvanized Steel Cable: Comparison Between Experiment and Finite Element Analysis</b> .....	499
Mustaqqim Abdul Rahim, Abdul Naser Abdul Ghani, Muhamad Arkam Che Munaaim and Zuhayr Md Ghazaly	
<b>Effects of Nano-silica on Concrete Properties—Literature Review</b> . . . .	507
Khaldon Kasim Aswed	
<b>Economic and Environmental Assessments for Constructing New Roads: Case Study of Al-Muthanna Highway in Baghdad City</b> .....	525
Qais S. Banyhussan, Sady A. Tayh and Ahmed M. Mosa	
<b>Effect of Semi-rigid Connection on Post-buckling Behavior of Braced-Steel Frames</b> .....	547
Douaa R. Mohammed and Murtada A. Ismael	
<b>Critical Transformational Time of Ground Level Ozone from Nitrogen Dioxide in Urban Area</b> .....	557
Hasifah Abdul Aziz, Wai Wei Khong, Norrimi Rosaida Awang, Arni Zulaikha Ismail, Nur Syifa Adnan, Wan Noor Syaheerah Wan Yuzamree and Amni Umirah Mohd Nazir	
<b>Bus Passenger's Satisfaction on Accessibility to AmanJaya Bus Terminal: A Gender Comparison</b> .....	567
Siti Fadhlina Muhammad Faisal and Nur Sabahiah Abdul Sukor	
<b>Best Position of Pile in Earth Slope</b> .....	579
M. Hajiazizi and F. Heydari	

**Relation Between Surface Preparation and Corrosion Resistance in Painted Steel Sheets** . . . . . 587  
 H. Kobayashi, K. Morita, Y. Yamashita and Y. Kataoka

**Application of a New Concept of Cracked Soils in Slope Stability Analysis with Heavy Rain and the Pattern of Cracks as the Governing Factors** . . . . . 601  
 D. Amalia, I. B. Mochtar and N. E. Mochtar

**Characteristic Study of Physical and Chemical Properties of Limestone Subjected to Adsorption of Fe and Mn in Groundwater** . . . . . 621  
 N. A. Akbar, H. A. Aziz and Mohd Nordin Adlan

**Rice Husk Ash Derived Sodium Silicate Using Hydrothermal and Convection Heating Methods** . . . . . 629  
 Tze Jhin Tsen, Daniel Kong, Ehsan Zeimaran and Marios Soutsos

**Influence of Twin Tunnel Depth in Numerical Ground Movement Prediction Using Mohr Coulomb and Hardening Soil Model** . . . . . 647  
 Darvintharen Govindasamy, Mohd Ashraf Mohamad Ismail and Mohd Faiz Mohammad Zaki

**Issues and Challenges Encountered by Project Managers Towards Small Public Construction Project Success in Malaysia—A Literature Synthesis** . . . . . 663  
 Syaharudin Shah Mohd Noor, Muneera Esa, Ernawati Mustafa Kamal and Rahimi A. Rahman

**The Effect of Ozonation By-products on Human Embryonic Kidney Cells (HEK293): Ozone as Wastewater Treatment Tool** . . . . . 671  
 Hind M. Ewadh, Siti R. Sheikh Abdullah and Nurina Anuar

**Comparison on Total Weight of Steel Reinforcement for 5 Story Reinforced Concrete Building with and Without Seismic Design** . . . . . 685  
 Mohd Irwan Adiyanto, Nur Hazwani Mohd Rashid, Syed Abdul Haris Syed Mustapa and Noram Irwan Ramli

**Comparison Between the Constraints of Building Information Modelling (BIM) and 3D Modelling** . . . . . 695  
 Lam Tatt Soon, Hasnanywati Hassan and Nazirah Zainul Abidin

**Influential Safety Performance and Assessment in Construction Projects: A Review** . . . . . 719  
 Wesam Salah Alaloul, Muhammad Ali Musarat, M. S. Liew and Noor Amila Wan Abdullah Zawawi

<b>The Impact of Road Alignment Toward Road Safety: A Review from Statistical Perspective</b> .....	729
Shatha Aser Aldala'in, Nur Sabahiah Abdul Sukor and Mohammed Taleb Obaidat	
<b>Pedestrian Walkability Index for Light Rail Transit (LRT) Stations in Klang Valley, Malaysia</b> .....	737
Steuart Jia Yun Chin, Boon Hoe Goh, Fang Yenn Teo, Byung Gyoo Kang and Choon Wah Yuen	
<b>Seismic Performance of Reinforced Concrete Residential Building Modeled Using Ruaumoko2D Program</b> .....	749
A. G. Kay Dora, J. Mohd Safwan, J. Nurjuhanah and R. N. Mohamed	
<b>Oil Palm Frond (OPF) Based Activated Carbon for Leachate Treatment</b> .....	761
N. H. Adam, M. S. Yusoff and H. Halim	
<b>Detecting Seasonal Extent of Inundated Area of River Body in Banyuasin Regency Using Radar Data of Sentinel-1A</b> .....	771
Fathoni Usman and Erwin Ibrahim	
<b>Use of Wheat Germ and Chitosan as the Natural Coagulant in Oleochemical Wastewater Treatment</b> .....	785
Chee Ming Choo, Kiat Wei Tok, Fang Yenn Teo, Chien Hwa Chong, Vui Soon Chok and Mohd Fariz Majid	
<b>Strength and Quality Assessment of Recycled Aggregate and Crumb Rubber Concrete Using the Ultra Pulse Velocity Method</b> .....	799
Mohd Ridhuan Ramlan, Shahiron Shahidan, Sharifah Salwa Mohd Zuki, Siti Radziah Abdullah, Mohd Haziman Wan Ibrahim and Mustaqim Abdul Rahim	
<b>Experimental Study on the Polyvinyl Chloride (PVC) Tubes Filled with Concrete Containing Recycled Concrete Aggregate</b> .....	807
LynDee Goh, Clotilda Petrus and Mimi Aznira Mohamad	
<b>Carbon Footprint Analysis of Industrialised Building System in Malaysia</b> .....	817
Yih Yoong Lip, Fang Yenn Teo and Ioannes Yu Hoe Tang	
<b>Parameter Optimization of Conceptual Tank Model for Groundwater Level Prediction</b> .....	827
Soon Min Ng, Mohd Ashraf Mohamad Ismail and Ismail Abustan	
<b>A Feasibility Study of Stormwater Management for a Campus University in Semenyih, Malaysia</b> .....	835
Ming Yuan Ting, Fang Yenn Teo, Ivan Kwong Hieng Theng and Boon Hoe Goh	

**The Evaluation of Changes in Camber Position to Deflection of Arch Steel Bridge in Extreme Loads** . . . . . 843  
 Widya Apriani, Fadrizal Lubis, Reni Suryanita and Yohannes Firzal

**Determination of Soil Bearing Capacity and Profile Using CAP-SASW Method at Western Malaysian Peninsular** . . . . . 855  
 A. B. Ramli, N. Kasim, N. N. Ismail, S. L. Ibrahim, Nadiah Md Husain and W. N. A. W. Azahar

**Reusable Concrete Debris as Aggregate Replacement on the Properties of Green Concrete** . . . . . 869  
 Nadiah Md Husain, A. A. A. Razak, W. N. A. W. Azahar, K. Norhidayu, N. N. Ismail, S. A. Saad, S. A. Masjuki, S. L. Ibrahim and A. B. Ramli

**Experimental Verification of Reinforced Concrete Pile Caps** . . . . . 879  
 Khattab Saleem Abdul-Razzaq, Mustafa A. Farhood and Ali Mustafa Jalil

**Rainfall Intensity (I)–Duration (D) Induced Debris Flow Occurrences in Peninsular Malaysia** . . . . . 897  
 N. Kasim, K. A. Taib, N. A. A. Ghazali, W. N. A. W. Azahar, N. N. Ismail, Nadiah Md Husain, A. B. Ramli, S. A. Saad, S. A. Masjuki and S. L. Ibrahim

**Acoustical Properties of Porous Concrete Containing Oil Palm Shell and Vermiculite** . . . . . 905  
 Z. Jahya, Z. Haron, K. Yahya, A. Z. Awang, M. S. T. Zulkarnain Tahmali, M. S. N. Samsul, M. N. Yahya and A. A. Jailani

**The Potential of Pineapple Leaf Fibre as an Acoustic Absorber** . . . . . 919  
 K. Yahya, Z. Haron, S. N. Shaikh Abdul Hamid, N. Mohd Fasli and E. M. Taiwo

**Investigation on Compatibility Property Between Aggregates and Bitumen Modified with Untreated and Treated Waste Cooking Oil** . . . . . 933  
 W. N. A. W. Azahar, R. P. Jaya, N. Kasim, N. N. Ismail, Nadiah Md Husain, S. A. Saad, S. A. Masjuki, S. L. Ibrahim, A. B. Ramli and N. K. Basri

**Effect of Sulfate and Nitrate Anions on the Oxidative Degradation of Tetrachloroethylene by Magnetite with Glutathione** . . . . . 943  
 Nur Dalila Mohamad and Amnorzahira Amir

**Low Carbon Geopolymer Hollow Block—Mix Design, Casting and Strength Comparison with OPC Hollow Block** . . . . . 959  
 U. Johnson Alengaram, Iftekhair Ibnul Bashar, Marios Soutsos, Karthick Srinivas, Daniel Kong, Arreshvhina Narayanan, Ooi Jieun Lin, P. S. Khoo, Abhey Gupta and William Doherty

<b>Analyzing the Moisture Susceptibility of Crumb Rubber Warm Mix Asphalt Using Imaging Technique</b> .....	973
Lillian Gungat and Nurul Ariqah Ispal	
<b>Rainfall Trend Analysis in the Upper Citarum River Basin, Indonesia</b> .....	985
Enung, Iwan K. Hadihardaja, M. Syahril Badri Kusuma and Hadi Kardhana	
<b>The Effect of Short-Term Exposure to Natural Outdoor Environment on the Strength of Tempered Glass Panel</b> .....	997
Mustafasanie M. Yussof, Shau Hui Lim and Mohd Khairul Kamarudin	
<b>Thermal Conductivity of Crumb Rubber as Partial Sand Replacement and Recycled Aggregates as Partial Coarse Aggregate Replacement in Concrete</b> .....	1007
Ridhuan Ramlan, Shahiron Shahidan, Nor Najihah Zainol, Sharifah Salwa Mohd Zuki, Alif Syazani Leman, Sajjad Ali Mangi, Ma Chau Khun and Fadzli Mohamed Nazri	
<b>Oxidation of Deep Well Saline Groundwater Generates the Precipitation of Ferrous Sulfide (FeS)</b> .....	1015
M. F. Mohd Akhir, N. A. Saad and Nor Azazi Zakaria	
<b>Recycled Aggregate Concrete in Post Disaster Economic Construction</b> .....	1031
Hafeth I. Naji, Mohammed Sh. Mahmood and Zahraa A. Jalil	
<b>Variations of Selected Criteria Air Pollutants During High Particulate Event</b> .....	1043
Syabiha Shith, Leong Weng Woh, Nor Azam Ramli, Maisarah Sulaiman, Nur Baitul Izati Rasli and Nurul Adyani Ghazali	
<b>Modal and Harmonic Response Analyses of the Kenyir Dam Intake Section</b> .....	1055
Azizi Arbain, Ahmad Zhafran Ahmad Mazlan, Mohd Hafiz Zawawi and Mohd Rashid Mohd Radzi	
<b>Identifying the Crack Nature Using b-Value Acoustic Emission Signal Analysis</b> .....	1065
N. A. A. S. Bahari, Shahiron Shahidan, M. F. M. Shukri, Sharifah Salwa Mohd Zuki, M. Y. Norbazlan, M. H. W. Ibrahim and Fadzli Mohamed Nazri	
<b>The Effects of Mixing Speed and Reaction Time on the Removal of Colour and Turbidity from Alor Pongsu Landfill Using Tin Tetrachloride</b> .....	1077
Siti Fatimah Ramli and Hamidi Abdul Aziz	

**Modification of Malaysia Bituminous Binder Using Waste Polystyrene** . . . . . 1091  
 Olufemi A. Johnson, Ibrahim Kamaruddin and Ibrislam Akbar

**HEC-RAS One-Dimensional Hydrodynamic Modelling for Recent Major Flood Events in Pahang River** . . . . . 1099  
 Muhammad Kashfy Zainalfikry, Aminuddin Ab Ghani, Nor Azazi Zakaria and Ngai Weng Chan

**Flow Resistance in Ecological Subdrainage Channel** . . . . . 1117  
 Muhammad Kashfy Zainalfikry, Aminuddin Ab Ghani, Nor Azazi Zakaria and Ngai Weng Chan

**Investigation on Strength Enhancement of U-TPOFA Based Binary Blended Alkali Activated Mortar Through Addition of Fly Ash** . . . . . 1129  
 Otman M. M. Elbasir, Megat Azmi Megat Johari, M. J. A. Mijarsh and Zainal Arifin Ahmad

**Human Factors Lead to Lift Accidents in High-Rise Residential Buildings** . . . . . 1139  
 Mustazha H. A. Tahari, Zainal A. Akasah and Sasitharan Nagapan

**Integrating Structural and Non-structural Flood Management Measures for Greater Effectiveness in Flood Loss Reduction in the Kelantan River Basin, Malaysia** . . . . . 1151  
 Ngai Weng Chan, Aminuddin Ab Ghani, Narimah Samat, Nik Norma Nik Hasan and Mou Leong Tan

**Flood Risk Estimation of Paddy Production Considering Plants' Age and Flood Durations** . . . . . 1163  
 Balqis M. Rehan, Ainun M. Yusuf and Iffah L. Idham

**Morphological Identification of Latex Modified Asphalt Binder Prepared with Surfactants** . . . . . 1175  
 Ashiru Sani, Mohd Rosli Mohd Hasan, Khairul Anuar Shariff, Sharvin Poovaneshvaran and Ilham Ibrahim

**Alternative Testing Protocol to Assess the Bonding and Shear Resistance of Pavement Bituminous Crack-Sealant Material** . . . . . 1187  
 Sharvin Poovaneshvaran, Mohd Rosli Mohd Hasan, Ashiru Sani and Raa Khimi Shuib

**Behaviour of Ultra-High-Performance Concrete Barrier Walls Subjected to Blast Loading** . . . . . 1201  
 Ahmed K. Taha, Zhengguo Gao, Dahai Huang and M. S. Zahran



<b>Simulation of Flow Profile Response to Alternate Bar Formation in Rivers</b> .....	1209
Mohd Zulkhairi Mat Salleh, Zulkiflee Ibrahim, Mazlin Jumain, Radzuan Saari, Muhammad Farid Muhammad Fathullah, Zulhilmi Ismail and Muhammad Hidayat Jamal	
<b>A State-of-the-Art of the Emergency Evacuation Capacity (EEC) Assessment for Rail Transit Terminal (RTT) in Malaysia</b> .....	1219
Norley Nadirah Shaari and Noorhazlinda Abd Rahman	
<b>Characteristic Study on Malaysia Power Plant Fly Ash Cenosphere</b> .....	1229
Salmia Beddu, Mahyun Mohd Zainoodin, Zakaria Che Muda, Daud Mohamad, Fadzli Mohamed Nazri, Zarina Itam and Siti Nabihah Sadon	
<b>Investigation of Natural Fibers as Ceiling Material</b> .....	1239
Salmia Beddu, Mahyun Mohd Zainoodin, Zakaria Che Muda, Nur Liyana Mohd Kamal, Daud Mohamad, Fadzli Mohamed Nazri, Sivakumar Naganathan, Nadiyah Md Husain and Siti Nabihah Sadon	
<b>Experimental on the Damages of the Cable-Net Structure Under Static Performance</b> .....	1245
N. Ashikin Marzuki, M. M. Yussof, M. S. Azhar, Kok Keong Choong and H. M. Yee	
<b>Road Traffic Noise Assessment at Sekolah Kebangsaan Sungai Bakap, Sungai Bakap, Penang, Malaysia</b> .....	1257
N. A. M. Saip, H. Halim, A. H. Salleh, A. Z. Amiruddin and Z. Ibrahim	
<b>Prediction of Odour Pollution in River Water Contaminated with Landfill Leachate Using COD and UV Absorption Indices</b> .....	1265
Syafinah Yusoff, Nastaein Qamaruz Zaman, Ahmad Shukri Yahya and Nurul Hana Mokhtar Kamal	
<b>Comparison of Different Methodologies for Determining the Efficiency of Gully Inlets</b> .....	1275
Sarah Alia Md. Wakif and Nuridah Sabtu	
<b>Utilization of Polyaluminium Chloride (PAC) and Tapioca Peel Powder (TPP) in Coagulation of Leachate for Degradation of Suspended Solids, Color, and Chemical Oxygen Demand</b> .....	1285
N. A. Ismail, M. Z. N. Shaylinda, S. N. A. Mohd-Salleh and W. M. W. Afnizan	
<b>Utilization of Sugarcane Pressmud as a Natural Absorbent for Heavy Metal Removal in Leachate Treatment</b> .....	1297
Nurul Nadiyah Mohd. Azme, Mohamad Fared Murshed, Siti Aisyah Ishak and Mohd Azam Mohd. Adnan	

**Linking Science and Administration: Local Ozone Management and Prevention Framework in Malaysia** . . . . . 1309  
 Nor Azam Ramli, Syabiha Shith and Norrimi Rosaida Awang

**Study on the Characteristic of Marine Dredged Sediment Using Admixture** . . . . . 1323  
 Prakash Kumaravelu, Mastura Azmi and Siti Aimi Nadia Mohd Yusoff

**Comparison of Bioavailable Phosphorus in River Sediments and River Bed Sediments from Agricultural and Urban Rivers** . . . . . 1333  
 Nur Fatin Hanani Binti Mohd Halid, Takanobu Inoue, Kuriko Yokota and Makoto Saga

**Supply Chain Framework in Enhancing Construction Waste Management: A Case Study in Klang Valley** . . . . . 1345  
 Raja Nor Husna Raja Mohd Noor, Intan Rohani Endut, Ahmad Ruslan Mohd Redzuan, Nuroh Huda Dahalan, Juzailah Nur Yunus and Nor Janna Tammy

**Empirical Study on Relationship Between Customer Satisfaction and QCLASSIC Performance Score in Northern Area** . . . . . 1377  
 N. H. Dahalan, N. Tuttur, R. H. R. M. Noor, J. N. Yunus and N. N. M. Yusoff

**Geographic Information System for Flood Control: Cilember River, Cimahi City, West Java Province** . . . . . 1387  
 Yackob Astor, Iin Karnisah, Bambang Setio Budianto and H. Dandi Aprillian

**The Criteria of Evaluating Active School Travel at Jerash Camp** . . . . . 1407  
 Enas Al-Najjar, Nur Sabahiah Abdul Sukor and Lina I. Shbeeb

**Building a Digital Model to Protect the City of Nasiriyah from Hydrological Hazards by Using Topographic Survey Methods and GIS** . . . . . 1419  
 Heba Sahib Dakheel, Raheem Hameed Abed and Murtadha Sarhan Satchet

**Development of Mode Choice Models for Undergraduate Students in Baghdad City** . . . . . 1443  
 Hanan Adil Khudhair and Samer Muayad Alsadik

**The Hydraulics and Morphodynamics of a Flooded Meandering Channel** . . . . . 1459  
 Zulkiflee Ibrahim, Radzuan Saari, Mazlin Jumain, Muhammad Nazmi Akmal Masri, Muhammad Afiq Md. Aris, Nur Atila Amzah, Md. Ridzuan Makhtar, Nurfarhain Mohamed Rusli, Abu Bakar Fadzil, Noraliani Alias, Amat Sairin Demun and Nor Suhaila Rahim

<b>The Influence of Extensive Green Roofs on Roof Thermal Performance in Batu Pahat Climate</b> .....	1473
Mohd Norfekry Md. Yacob, Hartini Kasmin, Mohd. Khairul Adam Mohd. Kori, Wan Afnizan Wan Mohamed, Siti Nazahiyah Rahmat and Mohd. Shalahuddin Adnan	
<b>Evaluation of Cost Analyses for Earthquake Resistant Reinforced Concrete Buildings Based on Malaysian National Annex to Eurocode 8</b> .....	1485
F. Faisal, S. S. Zaini and T. Selokumar	
<b>Co-composting of EFB and POME Using Rotary Drum Reactor by Partially Sequence Feeding Strategy</b> .....	1493
Rosnani Alkarimiah and Fatihah Suja'	
<b>Numerical Investigation on the Effectiveness of a Novel Flat Truss Shape Punching Shear Reinforcement</b> .....	1507
S. Salehuddin, S. S. Zaini and W. K. Chan	
<b>Compressive Strength and Microstructural Characteristics of Binary Blended Cement Mortar Containing Palm Oil Fuel Ash</b> .....	1513
Ramzi J. Shaladi, Megat Azmi Megat Johari, Zainal Arifin Ahmad and M. J. A. Mijarsh	
<b>Characterization of Aerobic Granular Sludge (AGS) Formation During Start-Up Phase for Leachate Treatment</b> .....	1523
Nur Ain Hamiruddin and Nik Azimatolakma Awang	
<b>The Influence of Communication on the Success Design of High-Rise Residential Building on Surabaya</b> .....	1537
D. Listyaningsih, C. Utomo and M. A. Rohman	
<b>Evaluation of Human Factors Influencing Labor Productivity in Construction Project</b> .....	1549
Nor Janna Tammy, Muhammad Mazasry Medani, Rozaini Ramli, Juzailah Nur Yunus and Raja Nor Husna Raja Mohd Noor	
<b>Seismic Performance of Soft Storey Reinforced Concrete Buildings in Ranau, Sabah Subjected to Design Seismic Load Stipulated in Malaysia National Annex to Eurocode 8</b> .....	1563
Kar Meng Ho and Tze Liang Lau	
<b>Morphology and Elemental Component of PM<sub>2.5</sub> at a School Located Near Industrial Area in Malaysia</b> .....	1575
Azrin Suroto, Noor Faizah Fitri Md. Yusof, Nur Amanina Ramli and Syabiha Shith	

**Structural Response of Building in Ranau, Kota Kinabalu and Lahad Datu, Sabah Under Different Earthquake Scenarios** . . . . . 1589  
 Zheng Yang Khoo and Tze Liang Lau

**Walking Induced Floor Vibration on Glulam Timber Floor** . . . . . 1605  
 N. H. Abd Ghafar, I. Z. Shamsul Kamar, E. C. David Yeoh and H. B. Koh

**Thermal Comfort Study Using CFD Analysis in Residential House with Mechanical Ventilation System** . . . . . 1613  
 Fathoni Usman and Ahmad Ridzuan Abu Bakar

**Flood Hazard Map of Upper Sungai Langat Using HEC-RAS** . . . . . 1629  
 Siti Multazimah Mohamad Faudzi, Ismail Abustan, Nuridah Sabtu and Muhammad Khairi A. Wahab

**Modeling the Fate of Phenol in Moving Bed Biofilm Reactor Sewage Treatment Plant** . . . . . 1643  
 Haider M. Zwain, Mohammadtaghi Vakili, Ahmed M. Faris and Irvan Dahlan

**Numerical Simulation of the Cascade Aerator in Removing Iron and Manganese** . . . . . 1655  
 Rhahimi Jamil, M. A. Z. Mohd Remy Rozainy, Mohd Nordin Adlan and Mohamad Aizat Abas

**Construct Reliability of Structural Equation Modelling (SEM) Exploratory Factor Analysis for a Distracted Driving Behavior Survey** . . . . . 1665  
 M. R. Kabit, M. M. S. Lee and N. Zulkipli

# The Evaluation of Changes in Camber Position to Deflection of Arch Steel Bridge in Extreme Loads



Widya Apriani, Fadrizal Lubis, Reni Suryanita and Yohannes Firzal

**Abstract** Visualization of the camber position, which has a negative value on the steel frame arch bridge causes user inconvenience and can even lead to a collapse hazard. Siak III Bridge is a national steel frame arch bridge as access between Pekanbaru City and other cities in Sumatra. Based on visual observations, the camber position has a negative value. Monitoring in the form of direct measurement of the bridge center coordinates using a total station tool to show that the camber decreases from the proper condition of the bridge coordinates. Purpose of this study to evaluating the performance bridge structure due to the combination load during the service life of the structure. Therefore, the methodology carried out was to analyze the performance of the bridge based on the model adopted from the 3D bridge and focused on bridge deflection. The analysis is carried out to estimate the deflection ratio of the bridge due to the load and to obtain critical conditions of the bridge structure. The deflection study uses Finite elements with SAP 2000 software. The results showed that based on the maximum deflection value caused by loading (SNI) T-02-2016 the condition of the actual bridge model was  $-196,470$  mm at the ultimate load conditions and  $-185,731$  mm under service load conditions. This result is still below the maximum allowable deflection ( $L/800$ ) of 200 mm. the benefits of this research can be an input for the government and parties related to bridge inspection in providing appropriate assessments for maintenance, repair, and improvement of bridge functions.

**Keywords** Deflection · Negative camber · Arch steel bridge · Bridge evaluation

---

W. Apriani · F. Lubis  
Civil Engineering Department, Faculty of Engineering, Universitas Lancang Kuning,  
Jl. Yos Sudarso Km 8, Pekanbaru, Riau, Indonesia

R. Suryanita (✉) · Y. Firzal  
Civil Engineering Department, Faculty of Engineering Universitas Riau,  
Kampus Bina Widya Jl. HR. Subrantas Km 12.5, Pekanbaru, Riau, Indonesia  
e-mail: [reni.suryanita@eng.unri.ac.id](mailto:reni.suryanita@eng.unri.ac.id)

## 1 Introduction

Damage to the bridge structure is a decrease in strength due to changes in material properties and changes in bridge geometry, which reduce the function of the bridge today or the future of the bridge. Siak III Bridge which was built in 2011 has a type of curved steel frame that has a span of 160 m long, 11 m high and 11 m wide, the kind of truss is reinforced concrete. This bridge has not been equipped with a bridge Structural Health Monitoring (SHM) tool. Based on field testing and visual observation, it is known that the Siak III Bridge camber is negatively found in the center position, as shown in Fig. 1.

Deflection of the camber exceeds the limit can affect the ability of service structure. From Fig. 1, the position of the camber significantly affects the deflection value of the bridge structure, the camber should be positive (convex). But the negative camber (concave) looks. Deflection is an essential factor that is calculated to determine the level of use of the bridge (serviceability) and can predict the performance of the bridge structure. Assessment of deflection can be done with a neural network system [9]. This method is a reliable solution in determining deviation in real terms. Besides, the determination of deflection can be done by the direct testing method [4]. This method can be used to obtain bridge conditions through a periodic investigation process on a bridge so that it can determine the stage of maintenance and repairs. But the method can only assess the state of the bridge through a visual survey method with equipment such as linear variable differential transformer (LVDT). Because of these limitations, deflection can be known by numerical methods with the help of finite element software [1]. This study aims to determine the remaining deflection values that occur in actual conditions with the help of finite element programs. The analysis is focused on the health of the bridge. The negative opponent of the camber is then simulated against a combination of loading, which is varied with extremely earthquake loads and service load (traffic).



**Fig. 1** Visual observation arch steel bridge of Siak III bridge

## 2 Literature Review

Many studies have been conducted on the assessment of bridges. The study was conducted among others who did real testing using LVDT sensors on bridges. The results of the study show that the accuracy of deflection results depends on many factors, including the location of the vehicle, vehicle speed, vehicle weight, and the exact position of the sensor [5]. Research that develops artificial neural network method. That shows that deflection value depends on the results of periodic testing data on a bridge so that it can determine the appropriate action for bridges [8]. This study focuses more on the use of deflection standards that have been formulated in Indonesian government regulations [10].

The bridge that receives the load will experience deflection. Based on the standards of the directorate general of Bina, the maximum allowable deflection limit is  $L/800$  (Table 1), where  $L$  is the length of the span [2]. The following is the deflection permit based on the Directive in the Directorate General of Highways, as shown in the table. For the deflection for beams on two supports or continuous girder, requirements deflection is  $1/800 \times \text{span}$ .

Based on SNI 03-1729-2015 on Planning Steel Structures with the LRFD Method that, composite structure components have moments of inertia that are greater than the elements of non-composite structures; consequently the deflection in the composite structure components will be smaller [3]. So for deflection in steel before the composite can be calculated based on Eq. (1).

$$\delta = (5/384 \times Q_t \times L^4)/(E \times I_x) \tag{1}$$

1. Maximum deflection in girder due to even load ( $Q$ ), centralized load ( $P$ ), and moment ( $M$ ) given by Eqs. (2), (3) and (4) respectively:

$$\delta_{maks} = 5/384 \times Q \times L^4/(E_s \times I_{tr}) \tag{2}$$

2. Maximum deflection on the girder due to centralized load ( $P$ ):

$$\delta_{maks} = 1/48 \times P \times L^3/(E_s \times I_{tr}) \tag{3}$$

**Table 1** Technical guidelines for the design of steel frame structures in the directorate general of highways

No	Description	Deflection ( $\delta$ )
1	Maximum deflection for beams on two supports or continuous girder	$1/800 \times \text{span}$
2	Maximum deflection for some pedestrian paths	$1/1000 \times \text{span}$
3	Maximum deflection due to dead load	$1/300 \times \text{span}$
4	Maximum deflection for live loads on cantilever structures	$1/300 \times \text{span}$

3. Maximum deflection in girder due to moment load (M):

$$\delta_{maks} = 1/72\sqrt{3} \times M \times L^2 / (Es \times I_{tr}) \quad (4)$$

where,

- $\delta$  deflection
- $Q_t$  total load on girder before composite
- $L$  length of bridge span
- $E$  steel elastic modulus
- $I_x$  moment of inertia
- $Q$  total weight itself
- $P$  centered load
- $M$  moment load

## 2.1 Camber

The camber bridge is a floor girder with a directional position that is convex arch, which is positive. The camber is design with a positive value because if gravity loads, it is expected that the condition of the truss surface/bridge floor remains flat/ not concave. Therefore the negative camber value under service load conditions can be worrying [7].

## 2.2 Combination of Loading According to SNI T-02-2016

Components and connections on bridges must fulfill a combination of loads. The purposed to determine in each boundary condition, including Strong I criteria taking into account the average load without taking into account wind loads. While Strong II, the burden of select vehicles without taking into account the wind [6]. In Strong, III is a standard load plus a wind load (90–126 kmh instead). The extreme combination is a combination that takes into account earthquake loads, while extreme combination 2 takes into account the load arising from ship collisions, vehicle collisions, floods. Combination of service load 1 is a combination of loads that take into account the bridge operating load and wind load. The combination of service load II is intended to prevent the stress of steel structures. Combination service III further reviews the tensile stress in the direction of the bridge extending. Combination service IV is used to calculate the tensile stress in the column to control the size of the crack. In boundaries, status is a fatigue condition (Table 2) in



**Table 2** Load combinations

Boundary stats	MS MA	TT TD TB TP	EU	EW <sub>s</sub>	EW <sub>L</sub>	BF	EU <sub>n</sub>	Use one		
								EQ	TC	TC
Ultimate I	$\gamma_P$	1.8	1	–	–	1	0.5/1.2	–	–	–
Ultimate II	$\gamma_P$	1.4	1	–	–	1	0.5/1.2	–	–	–
Ultimate III	$\gamma_P$		1	1.4	–	1	0.5/1.2	–	–	–
Ultimate IV	$\gamma_P$		1		–	1	0.5/1.2	–	–	–
Ultimate V	$\gamma_P$		1	1.4	–	1	0.5/1.2	–	–	–
Extreme I	$\gamma_P$	<i>EQ</i>	1	–	–	1	–	1	–	–
Extreme II	$\gamma_P$	0.5	1	–	–	1	–	–	1	1
Serviceability I	1	1	1	0.3	1	1	1/2	–	–	–
Serviceability II	1	1.3	1	–	–	1	1/2	–	–	–
Serviceability III	1	0.8	1	–	–	1	1/2	–	–	–
Serviceability IV	1	–	1	0.7	–	1	1/2	–	–	–
Fatigue	–	0.75	–	–	–	–	–	–	–	–

Note  $\gamma_P$  can be  $\gamma_{MS}, \gamma_{MA}, \gamma_{TA}, \gamma_{PR}, \gamma_{PL}, \gamma_{SH}$  depending on  $-\gamma_{EQ}$  is a living factor for earthquake conditions

connection with fatigue life due to induction of the load, which is unlimited in time. That Boundary status for combination load can be seen in Table 2. From Table 2, there is any combination to analysis and to get the maximum value.

### 2.3 Load Groups and Symbols for Loads

The following permanent and transient loads must be calculated in bridge planning:

Permanent Load

MS = dead load of structural components and nonstructural bridges

MA = pavement, and utility dead load

Transient Load

TB = force due to brakes

EQ = earthquake force

TD = "D" lane load

TT = truckload "T"

TP = pedestrian load

ET = force due to gradient temperature.

### 3 Research Methods

The case in this study based on the Siak III Bridge. Model of the bridge was defined on SAP 2000. The longitudinal section of the bridge and the bridge perspective can be seen in Fig. 2. Twenty-one nodal bridge numbers will be used as reference points in analyzing deflection.

This research by the collection of bridge data needed, including standard archery image, bridge coordinate measurement data, and data from bridge material testing, as shown in (Table 3).

#### 3.1 Research Instrument

To measure deformation and displacement, total station, as shown in Fig. 3. Measurements on the part of the structure of the bridge, namely the girder section. The purposed to determine the existing bridge's camber, which is known to have a tendency not to match the camber on the bridge planning data. The analysis by comparing secondary data planning with the results of measurements in the field.

The finite element model of the bridge was developed using the structural analysis program SAP 2000. Four node shell elements were used to represent the top and bottom flanges, the webs, and diaphragms besides modeling work based on coordinates obtained from the AutoCAD 2010 program. The direction of axis used is x-axis for length bridge and y-axis for the height of the bridge. Then the section properties are determined according to the secondary data obtained. The loads that were defined included in the structure, such as dead loads, live loads, and earthquake loads. This loading as an indicator of checking cross-section resistance and structural strength. This modeling refers to the Indonesian National Standard (SNI) T-02-2016 concerning Standard for Loading for Bridges and designs that see to the Planning of Steel Structures for Bridges.

Meanwhile, the calculation method used uses the deflection of the camber exceeds the limit can affect the ability of service structure (LRFD) code created by AISC. In this section, enter the geometry data of the bridge. After the modeling,

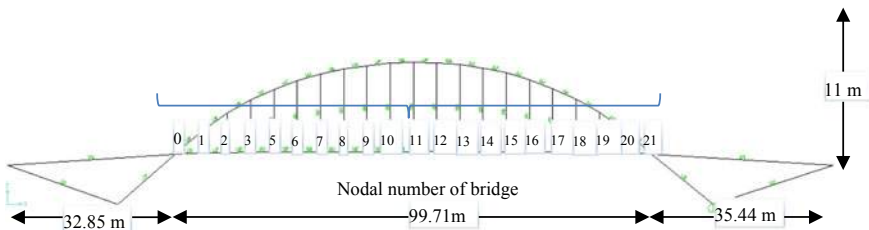


Fig. 2 Longitudinal cross section of bridge

**Table 3** Section properties of bridge


Section properties material	Dimensions
<i>Hanger dimension</i>	
Diameter hanger	100 mm
Road width	7000 mm
Width of shoulder bridge	1600 mm
Total bridge width	10,200 m
<i>Frame dimensions</i>	
– Arch rib (box steel)	1200 × 800 m tw = 24 mm
– Tie beam	600 × 600 mm tw = 24 mm
– Floor beam	400 × 400 mm
<i>Mechanical properties of structural steel</i>	
– Structural steel	JIS G 3106 SM YB
– Stress yield (fy)	295 MPa
– Ultimate strength (fu)	490 MPa
– Modulus of elasticity	200,000 MPa
– Specific gravity	78.5 kN/m <sup>3</sup>
Hanger steel	Grade 490
– Yield stress	490 MPa
– Ultimate stress	610 MPa
Modulus of elasticity	210,000 MPa
Weight gravity	78.5 kN/m <sup>3</sup>



**Fig. 3** Measuring camber position bridges with total station

checked the structure. This analysis is useful for determining deflection that occurs in modeling existing structures. The modeling carried out in the finite element program can be seen in Fig. 4.

Calculation of loading is carried out to determine the load acting on the bridge. The finite element modeling included theoretical and combination burdens which were adjusted to SNI for 2016 so that the existing bridge performance produced.

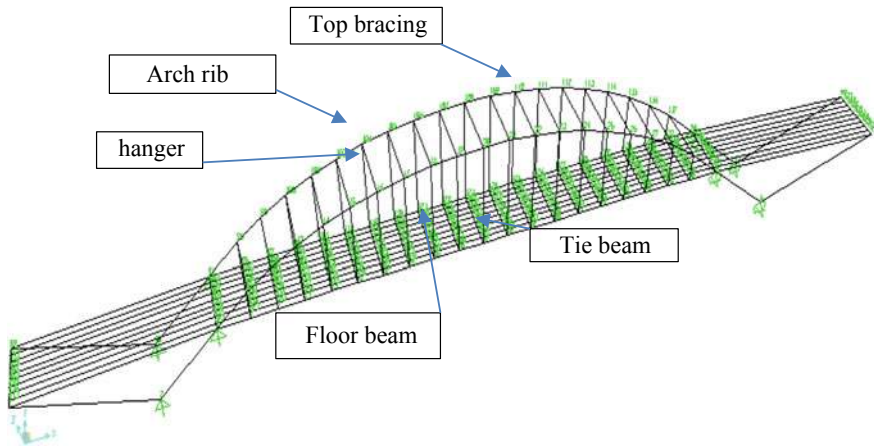

**Fig. 4** Arch bridge with all its element

The actual modeling, this is done to determine deflection and force of the rod that occurs on the bridge. Own weight is given automatically and counted by soft-ware. The dynamic load input to the modeling calculated. The evenly divided load used is  $BTR = 9.0 (0.5 + 15/160) = 5.34375 \text{ kN/m}^2$  and the centralized line load used is  $49 \text{ kN/m}$  with a dynamic enlargement factor of 1375. The weight test truck and the placement of the load of the test truck adjusted to the conditions at the time of load testing.


### 3.2 Earthquake Data

The seismic load is calculated based on Earthquake Resilience Planning Procedures for Building (SNI 03-1726-2002) with dynamic methods Response Spectrum Analysis. From the analysis of retrieved conditions provide value style/greatest moments as a basis for planning. In the study of structures against earthquake loads, building mass will determine the force of inertia caused by the earthquake. The earthquake recordings selected for analysis are earthquake response spectrum records in Pekanbaru, Riau region as can be seen in Fig. 5.

## 4 Result and Discussion

In the actual research, deflection values that occur due to a combination of service, extreme, and fatigue load. This values obtained to compared with the deflection value of the  $L/800$  permit ( $L$  is the length of the bridge) which is equal to 150 mm.

**Fig. 5** Input data on the response spectrum of Pekanbaru earthquake

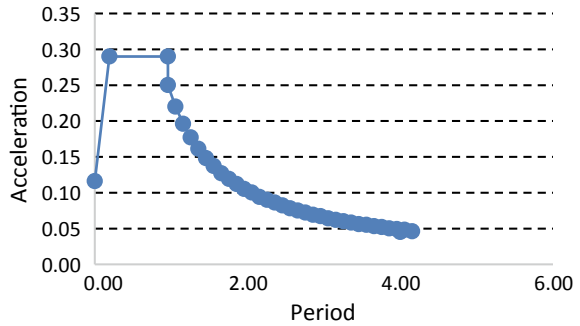


The following is the deflection value of the load combination according to SNI 1725-2016 concerning loading for bridges. The subsequent analysis will be to find the point that has the most significant displacement, then compared with the allowable deflection. From Table 4, there are 4 points (466, 467, 468, 470) which have the most considerable displacement in each of the coordinates. The resulting deflection value can see in (Table 4).

The results showed that based on the maximum deflection value caused by loading (SNI) T-02-2016 on the condition of the actual bridge model is  $-196,470$  mm under the ultimate load conditions Strong II) means a combination of loading associated with the use of bridges to bear individual vehicle loads determined by the owner without taking into account the wind load. Maximum deflection is  $-185,731$  mm at serviceability II, a combination of loading intended to prevent melting of the steel structure and slip on the joints due to the load of the vehicle. This value is still below the maximum permit deflection ( $L/800$ ) which is

**Table 4** Combination deflection value of SNI 1725-2016 load

Combination of loading	Joint	Deflection Z (mm)	Deflection permits SNI (mm)	Deflection LRFD (mm)
Extreme I	468	-106.423	200	666.7
Extreme II	468	-102.796	200	666.7
Fatigue	466	-84.876	200	666.7
Strong I	466	-139.850	200	666.7
Strong II	467	-196.470	200	666.7
Strong III	470	-56.490	200	666.7
Strong IV	470	-57.913	200	666.7
Strong V	470	-57.507	200	666.7
Serviceability I	467	-153.317	200	666.7
Serviceability II	467	-185.731	200	666.7
Serviceability III	468	-132.253	200	666.7
Serviceability IV	470	-57.202	200	666.7
Maximum	467	-196.470	200	666.7

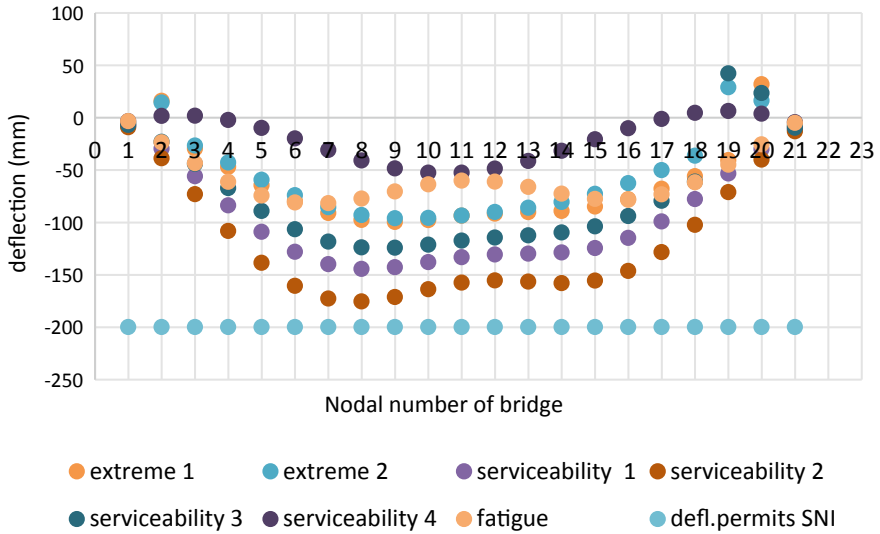

**Fig. 6** Deflection value in each load combination

200 mm and 666.7 mm according to the LRFD requirements. The deviation of each girder nodal point was analyzed and compared to the deflection permits that had calculated shown in Fig. 6.

From Fig. 6 above, it can show that all nodal bridges, when subjected to a various combination are still safe and capable of serving. Each point that experiences deflection is below the deflection permit point (200 mm), while the combination that most determines the state of de-flection can be known is service condition 2.

### 5 Conclusion

The results showed that based on the maximum deflection value caused by loading (SNI) T-02-2016 the condition of the actual bridge model was  $-196,470$  mm at the ultimate load conditions and  $-185,731$  mm under service load conditions. This value is still below the maximum allowable deflection ( $L/800$ ) of 200 mm. It hoped that this research could be an input for the government and parties related to bridge inspection in providing appropriate assessments for maintenance, repair, and improvement of bridge functions.

**Acknowledgements** Gratitude to the Ministry of Research, Technology and Higher Education of Indonesia Grant for Higher Education Cooperation Year 2019–2020, Ministry of Public Works and Public Housing Indonesia and Civil Engineering Study Program at Lancang Kuning University.

## References

1. Apriani W (2018) 'Penilaian Jembatan Rangka Baja Transfield Australia Dengan Metode Fracture Critical Member (Studi Kasus : Jembatan Siak 2 Pekanbaru)', (September), 18–19
2. BMS, T (1993) Bridge management system, 1
3. BSN (2015) Tata Cara Perancangan Struktur Baja
4. Gupta RK (2013) Closed form solution for deflection of flexible composite bridges. *Proc Eng* 51:75–83
5. Helmi K (2015) Reference free method for real time monitoring of bridge deflections. *Eng Struct* 103:116–124
6. Nasional BS (2016) SNI 1725-2016 Pembebanan untuk jembatan
7. Republic C (2019) Damage investigation of pre-stressed cables in segmental box girder damage investigation of pre-stressed cables in segmental box girder concrete bridge ev. no. 324–018 in Pardubice, Czech Republic, 324:0–7
8. Suryanita R, Adnan A (2013) 'Application of neural networks in bridge health prediction based on acceleration and displacement data domain application of neural networks in bridge health prediction based on acceleration and displacement data domain, 1:4–9
9. Tadesse Z (2012) Neural networks for prediction of deflection in composite bridges. *J Constr Steel Res* 68(1):138–149
10. Tian Y (2017) Flexibility identification and deflection prediction of a three-span concrete box girder bridge using impacting test data. *Eng Struct* 146:158–169